


„ASPAMET”

DIVISION OF EQUIPMENT FOR ENVIRONMENT PROTECTION

SUBMERSIBLE AGITATOR: AR.170.2.80.90

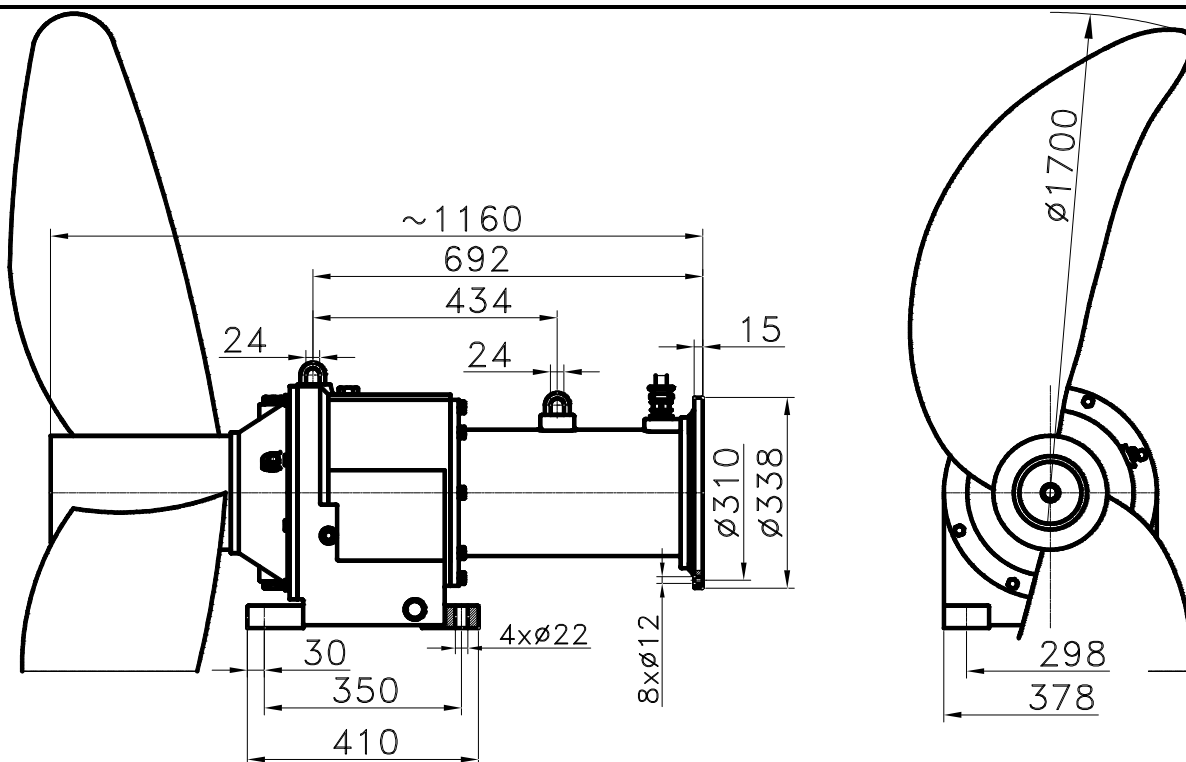

TECHNICAL DATE:

PROPELLER DIAMETER	1700	[MM]	RATED CURRENT	19.7	[A]
PROPELLER SPEED	70	[1/MIN]	POWER TAKEN FROM MAINS*	9.3	[kW]
MOTOR POWER	9.0	[kW]	AXIAL FORCE*	4.38	[kN]
FREQUENCY	60	[Hz]	FLOW*	2.23	[M ³ /s]
VOLTAGE	380	[V]	WEIGHT	275	[KG]

TECHNICAL DESCRIPTION:

*FOR DENSITY 1000 KG/M³

STANDARD	THERMAL SENSOR IN STATOR, MOTOR HOUSING MATERIAL: CAST IRON, GEAR BOX HOUSING MATERIAL: CAST IRON PROPELLER MATERIAL: SYNTHETIC POWER SUPPLY CABLE: 10M	OPTION:	LEAKAGE DETECTOR, TEMPERATURE-SENSITIVE RESISTOR PT100 MOTOR HOUSING MATERIAL: STAINLESS STEEL, ACID-PROOF STEEL

VELOCITY DIAGRAM (FOR DENSITY 1000 KG/M³)

